COMBI COUPLING INSTRUCTIONS

1) **Bring the display cases closer together (5-10 cm) by positioning them at the point of installation.**

2) **2) Support the ceiling light and the glass case with polystyrene or other material (as in the photo), before removing the sides on the coupling side, one in wood for transport, and the other in glass, which must then be reassembled once the procedure is complete.**



3) **Join the showcases by tightening the tubular plinths and insert the screws at the points indicated in the photo**.

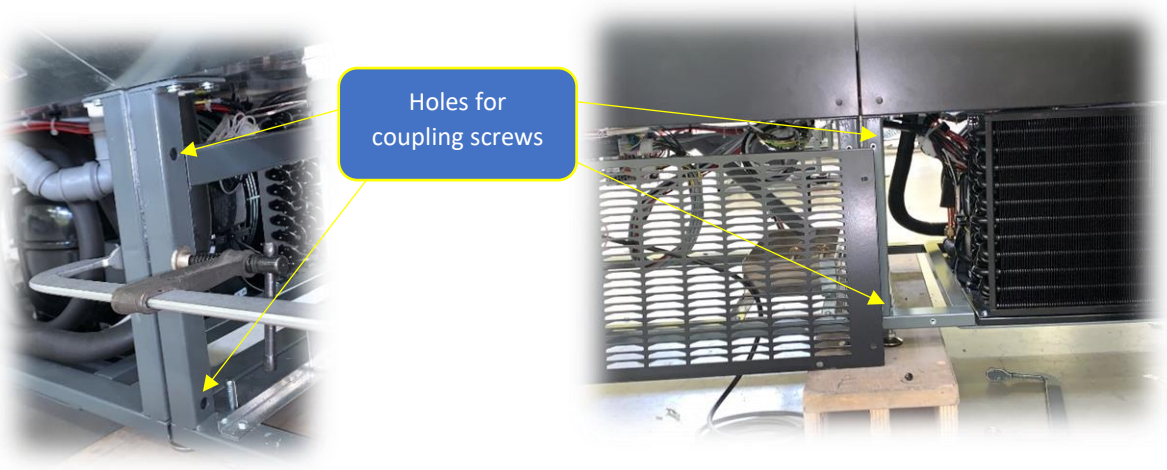

4) Insert the central glass side, and fix it using the screws on the three points.

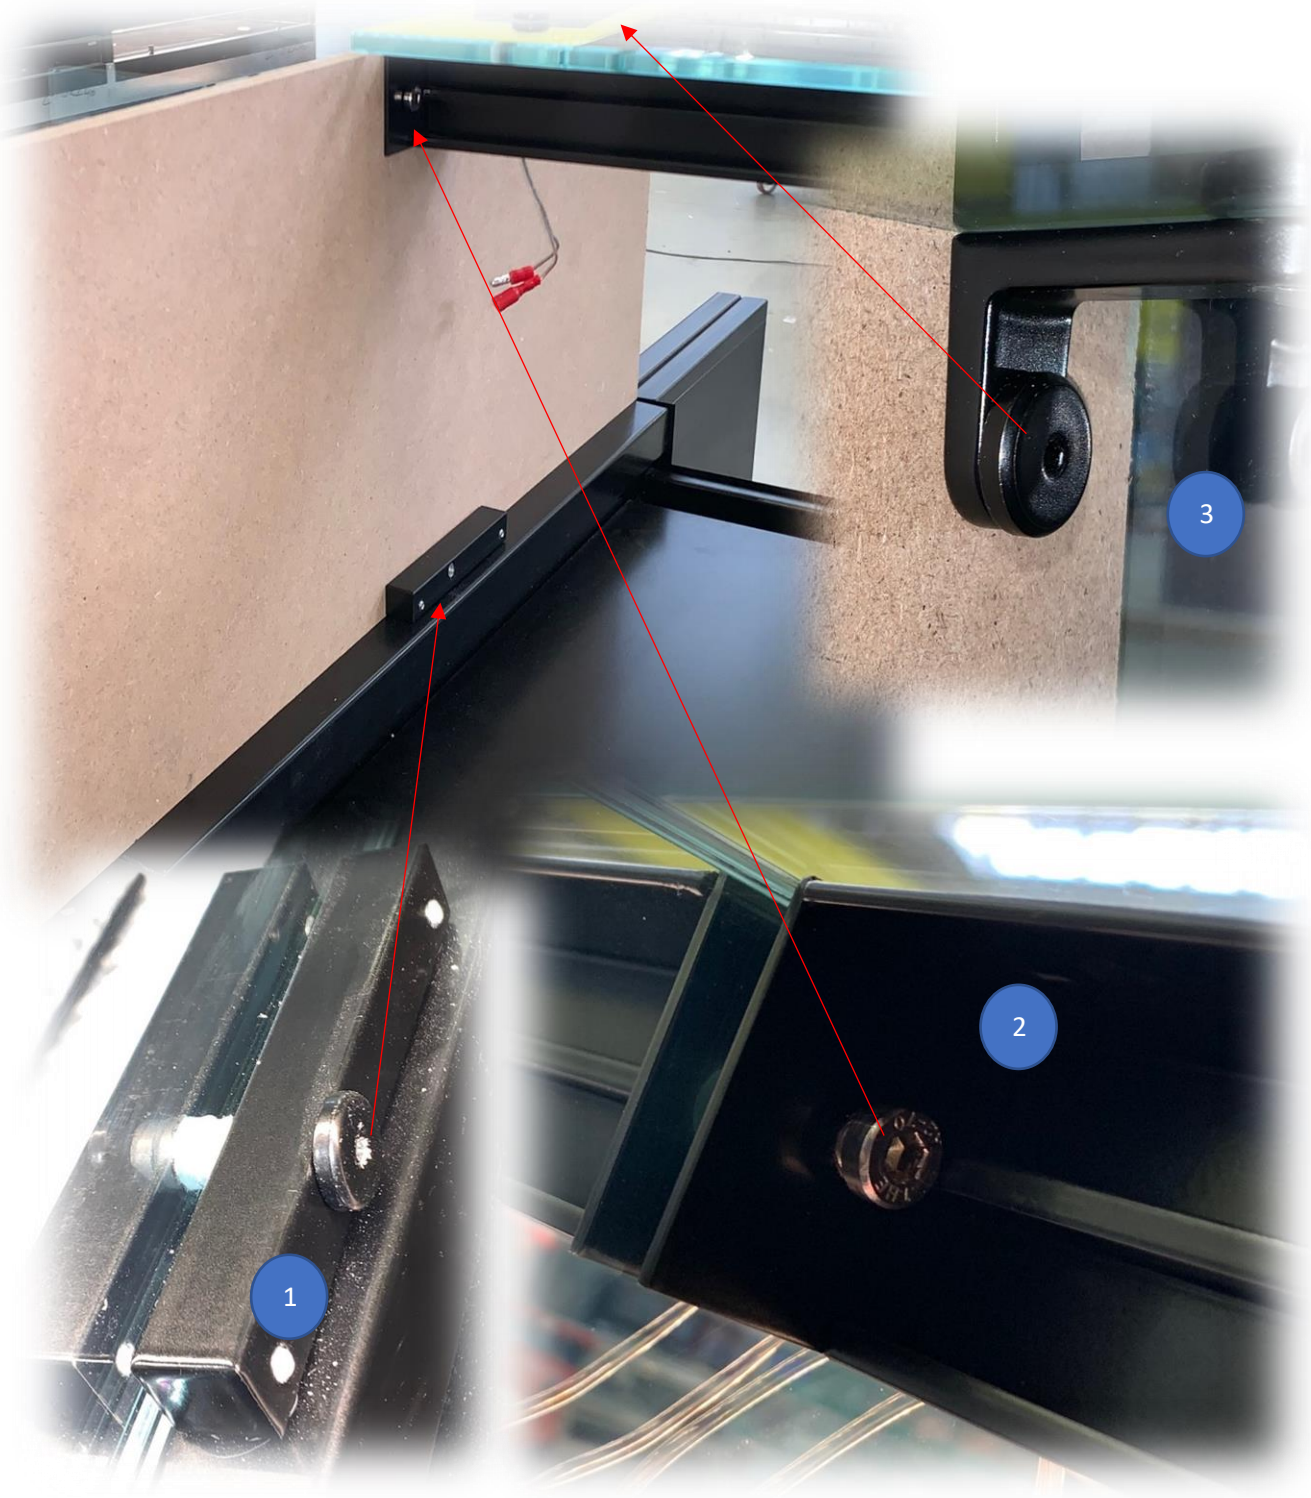

5) **Feed the lighting wires through the hole in the glass side and connect them by the two plug connectors.**

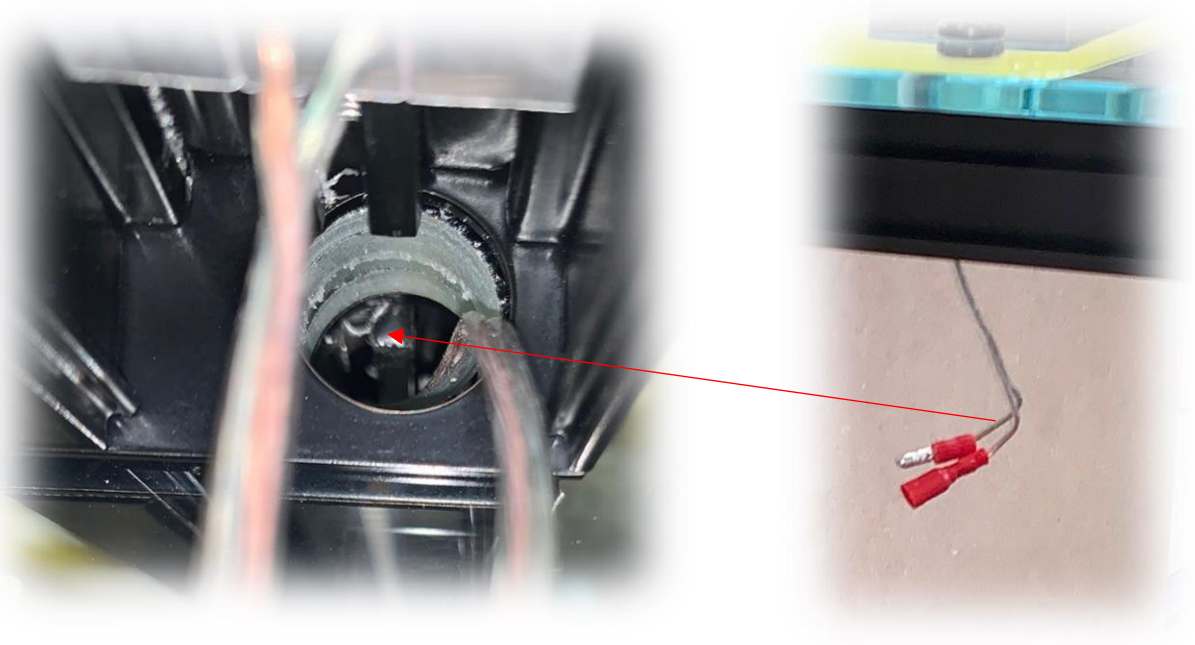

6) **6) Refit the protective cover.**

