JEWELLERY P8 R4

CIAM



IT

Vetrina Refrigerata Ventilata

Teca vetro con serraggio meccanico | vetro frontale, fianchi laterali e schienale a cassetti in vetro riscaldato | micro-plafoniera in alluminio brillante con illuminazione led no-spot 3000°K | vasca coibentata con poliuretano ecologico e rivestita in acciaio inox | refrigerazione ventilata con sistema a capillare (valvola termostatica per motore esterno) | centralina elettronica e lettore digitale della temperatura a filo piano | vassoi espositivi a cassetti complanari estraibili | telaio portante in acciaio zincato con piedini inox regolabili in altezza

EN

Ventilated Refrigerated Showcase


Glass gantry with mechanical fastening | front glass, sides and back with drawers in heated glass | bright aluminum micro-ceiling light with 3000°K diffused LED lighting | tank insulated with ecological polyurethane and covered with stainless steel | ventilated refrigeration with capillary system (thermostatic valve for external compressor) | electronic control unit and digital temperature reader flush with the surface | display trays with pull-out coplanar drawers | supporting frame in galvanized steel with height-adjustable stainless steel feet


FR

Vitrine Réfrigérée Ventilée

Vitrage avec fermeture mécanique | vitre frontal, panneaux latéraux et dossier avec tiroirs en verre chauffé| micro-plafonnier en aluminium brillant avec éclairage à bandeaux LED diffusant 3000°K | cuve isolée avec du polyuréthane écologique et revêtue en acier inoxydable | réfrigération ventilée avec système capillaire (vanne thermostatique pour groupe distant) | commande numérique et afficheur de température encastré dans le plan | plateaux d'exposition et tiroirs coplanaires extractibles|châssis en acier galvanisé avec pieds en acier inoxydable réglables en hauteur

+4°C / +6°C

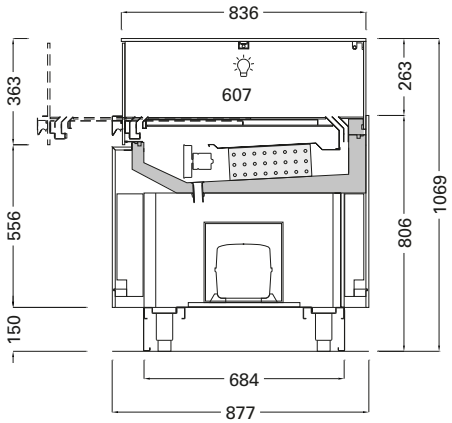



TS
UV-glued







R4UP
lift-up top glass


Technical

- Ventilated
- R290
- Hermetic
- LED no-spot 3000°K
- Automatic
- N. 3 / H.R. 60% 25 °C (77 °F)
- 230 V / 1 Ph / 50 Hz
- +4/+6°C


Data Sheet (built-in compressor)

	Code (+SKIN) Energy Label	Dimensions mm	Weight Kg	Max Pwr. Consumption W / A	Avg Operating Consumption KW/h	Cooling Power/Expansion W / °C	GAS Type
	JEP8R4090I A↑G F	900x867x1069H 1080x1047x1359H	100 76	500 / 3.5	0.25	450 / -10	R290
	JEP8R4130I A↑G F	1300x867x1069H 1480x1047x1359H	140 104	650 / 3.9	0.35	600 / -10	R290
	JEP8R4150I A↑G F	1500x867x1069H 1680x1047x1359H	190 117	800 / 4.5	0.5	700 / -10	R290
	JEP8R4170I A↑G F	1700x867x1069H 1880x1047x1359H	220 132	1000 / 6.0	0.7	780 / -10	R290
	JEP8R4210I A↑G F	2100x867x1069H 2280x1047x1359H	250 160	1200 / 6.5	0.85	1000 / -10	R290

Options:




logo on internal drawer



customized display drawer



chocolate



condensation water pan



kit of casters



ciam connect



whide system

CIAM Spa
Viale dei Pini, 9 - 06081 Petrignano di Assisi - PG, Italy
T +39 075 80161 - info@ciamgroup.it - www.ciamweb.it

Certifications
ISO9001 Quality
ISO14001 Environmental
ISO45001 Safety
ISO50001 Energy