JEWELLERY R4L P8

CIAM



IT

Vetrina Refrigerata Ventilata

Teca vetro con serraggio meccanico | vetro frontale, fianchi laterali e schienale a cassetti in vetro riscaldato "no fog" (solo per versione pasticceria +4°C) | micro-plafoniere in alluminio brillante integrate nelle estremità longitudinali del cappello vetro con illuminazione led no-spot 3000°K | vasca coibentata con poliuretano ecologico e rivestita in acciaio inox | refrigerazione ventilata con sistema a capillare (valvola termostatica per motore esterno) | centralina elettronica e lettore digitale della temperatura a filo piano | vassoi espositivi a cassetti complanari estraibili |telaio portante in acciaio zincato con piedini inox regolabili in altezza

EN

Ventilated Refrigerated Showcase

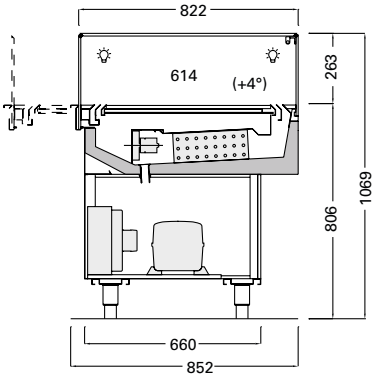
Glass structure with mechanical fastening front glass, sides and back with drawers in no fog heated glass (just for pastry +4°version) | Bright aluminum micro-lamps integrated into the top of the glass gantry with 3000°K diffused LED lighting | tank insulated with ecological polyurethane and covered with stainless steel | ventilated refrigeration with capillary system (thermostatic valve for external motor) | electronic control unit and digital temperature reader flush with the surface | display trays with removable coplanar drawers | supporting frame in galvanized steel with height-adjustable stainless steel feet

FR

Vitrine Réfrigérée Ventilée

Vitrage avec fermeture mécanique. Vitre frontal, panneaux latéraux et dossier avec tiroirs en verre chauffé | Micro-lampes LED diffus de 3000°K en aluminium intégrées dans la partie supérieure du cadre en verre avec un éclairage | cuve isolée avec du polyuréthane écologique et revêtue en acier inoxydable | réfrigération ventilée avec système capillaire (vanne thermostatique pour groupe distant) | commande numérique et afficheur de température encastré dans le plan | plateaux d'exposition et tiroirs coplanaires extractibles|châssis en acier galvanisé avec pieds en acier inoxydable réglables en hauteur

+4°C



Technical

Ventilated

Automatic

R290

N. 3 / H.R. 60% / 25 °C





Hermetic

230 V / 1 ph / 50 Hz


Led 3.000°K


+4°C (+39,2°F)


Data Sheet


	Code (+SKIN) Energy Label	Dimensions mm	Weight Kg	Max Pwr. Consumpion W / A	Avg Operating Consumption KW/H	Cooling Power/Expansion W / °C	GAS Type
	JEP8R4L090I A↑G F	900x852x1069H 1080x1032x1359H	100 76	500/3,5	0,25	450 / -10	R290
	JEP8R4L130I A↑G F	1300x852x1069H 1480x1032x1359H	140 104	650/3,9	0,35	600 / -10	R290
	JEP8R4L150I A↑G F	1500x852x1069H 1680x1032x1359H	190 118	800/5,0	0,5	700 / -10	R290
	JEP8R4L170I A↑G F	1700x852x1069H 1880x1032x1359H	220 132	1000/6,0	0,7	780 / -10	R290
	JEP8R4L210I A↑G F	2100x852x1069H 2280x1032x1359H	250 160	1200/6,5	0,85	1000 / -10	R290


Options:


logo on internal drawer


customized display drawer


chocolate


condensation water pan


kit of casters


ciam connect



whide system

CIAM Spa
Viale dei Pini, 9 - 06081 Petrignano di Assisi - PG, Italy
T +39 075 80161 - info@ciamgroup.it - www.ciamweb.it

Certifications
ISO9001 Quality
ISO14001 Environmental
ISO45001 Safety
ISO50001 Energy